

**IJRAME**

ISSN (ONLINE): 2321-3051

**INTERNATIONAL JOURNAL OF RESEARCH IN  
AERONAUTICAL AND MECHANICAL ENGINEERING****Fabrication of Motorized Tri-Cylinder Air Compressor****M.SRINIVASAN<sup>1</sup>, R.PRAKASH<sup>2</sup>, P.KARTHIKEYAN<sup>2</sup>, N.ABUTHAHIR<sup>2</sup>, S.VIGNESHWARAN<sup>2</sup>**<sup>1</sup>*Prof., Department of Mechanical Engineering, srinimechksr@gmail.com.*<sup>2</sup>*Final Year Student, Department of Mechanical Engineering, pkarthi18@gmail.com  
Jay shriram group of institutions, tiruppur, 8883335892, rpks.30@gmail.com***Abstract**

The compressor is mechanical equipment which is used to increase the pressure with the help of the piston. Need to improve the performance of compressor by several methods. The main aim of the project is to make tri-cylinder air compressor to generate large amount of air with less power and low vibration. In tri cylinder air compressor the three cylinders are kept at 120 degree to each other. The three cylinders are placed radically and equally apart such that the cylinder opening tends to meet on a common triangular compression chamber. The three pistons are made to compress air simultaneously on to common tri angular chamber over shorter stroke and the isothermal efficiency will be better than single cylinder with one piston. The motor is connected to the chain drive to drive the three crank shaft which is used to move the piston. If space is smaller the pressure will be more and bigger the lower. If compressor is made to work at 1400 rpm air taken will be  $147.18 \times 1400 = 206052$  liters at 7 atmospheres pressure. The advantage with triangular compressor will be low vibration, smaller unit giving more output and so cheaper to make, ideal for air compressor is Air conditioning and Refrigeration, Vacuum pumps and general purpose usage.

**Key words:** Air compressor; Tri cylinder air compressor; Tri angular compressor.

**1. Introduction**

The compressor is mechanical equipment which is used to increase the pressure with the help of the piston.

**1.1. Types of air compressor**

According to the design and principle of operation

1. Reciprocating compressor
2. Rotary screw compressor
3. Turbo compressor

### ***1.2 Positive displacement***

Positive-displacement air compressors are the type of compressor executed by forcing air into a chamber whose volume is decreased to compress the air. Piston-type air compressors use this principle by pumping air into an air chamber through the use of the same motion of pistons. This type of compressor uses one-way valves to guide air into a chamber, where the air is compressed. Rotary screw compressors also utilize positive-displacement compression by matching two helical screws that, when turned, guide air into a chamber, whose volume is increased as the screws turn.

Vane compressors use a slotted rotor with varied blade placement to guide air into a chamber and compress the volume. This type of Compressor delivers a fixed volume of air at high pressures. The types of positive displacement compressors include piston compressors and rotary screw compressors.

### ***1.3 Negative displacement***

Negative-displacement air compressors consist of the centrifugal compressors. This type of compressor use centrifugal force generated by a spinning impeller to accelerate and then decelerate captured air, which pressurizes the air.

### ***1.4 Cooling***

The result of adiabatic heating, air compressors require some type of disposing of waste heat for the better performance. Generally the cooling is some form of air- or water-cooling, although some (particularly rotary type) compressors may be cooled by oil (that is then in turn air- or water-cooled) and the atmospheric changes also included during cooling of compressors.

### ***1.5 Tri-cylinder air compressor***

We need to improve the performance of compressor by several methods. Such as designs shape and construction are known and screw type compressor is the latest design as on date. The power required to compressor air to a known pressure is given in the attached tables. One cubic root of air equals approximately 28 liters its volume we brought of a novel idea to design the triangular compressor as per the attached sketches or diagrams with this.

It is three cylinder compressors placed radially and equally apart such that the cylinder openings tend to meet on a common triangular compression chamber that has one inlet and outlet valve to a tank for receiving air in the compressed state. As an example let us take a 100cc displacement single cylinder compressor, e.g. that will have a bore of 50 mm and stroke 50mm. Now all 3 pistons are made to compress air simultaneously on to common triangular chamber over shorter stroke and so the isothermal efficiency will be better than the single cylinder one of 50cc piston also there will be no vibration due to triangle force acting towards the middle at the same time. Adiabatically also this will be advantages since 3 cylinders displacement is pushed at the same

velocity and force on the common chamber because the three piston move at equal velocity driven by one chain to achieve this 3 compressors cranks sprockets as teeth. For every rotations of crank each pistons will move once from TDC to BDC and BDC to TDC two strokes. Therefore theoretically 147.18cc of air will be taken in and compressed to the volume of smaller space is the common compression chamber. If space is smaller the pressure will be more and bigger the lower. If compressor is made to work at 1400 rpm air taken will be  $147.18 \times 1400 = 206052$  liters at 7 atmospheres pressure the advantage with triangular compressor will be low vibration, smaller unit giving more output and so cheaper to make, ideal for air compressor is Air conditioning and Refrigeration, Vacuum pumps and general purpose usage.

### ***1.6. Belt drive***

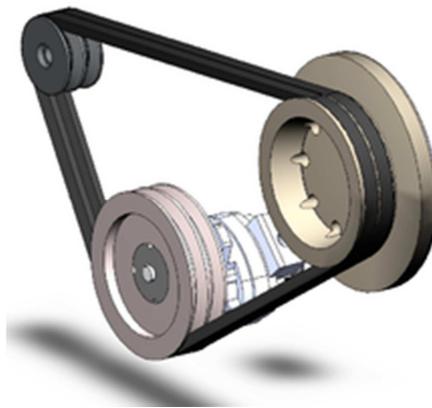


Figure 1 - Belt drive

A belt is a closed loop of flexible material used to mechanically link two or more rotating shafts, most often parallel. Belts may be used as a source of motion, to transmit power efficiently, or to track relative movement. Belts are looped over pulleys and may have a twist between the pulleys, and the shafts need not be parallel. In a two pulley system, the belt can either drive the pulleys normally in one direction (the same if on parallel shafts), or the belt may be crossed, so that the direction of the driven shaft is reversed (the opposite direction to the driver if on parallel shafts). As a source of motion, a conveyor belt is one application where the belt is adapted to continuously carry a load between two points.

### ***1.7. Material selection***

#### ***1.7.1 Compressor head***

The material chosen for the body of the compressor head is high grade aluminum alloy IS4250. The head is of triangular shape with an angle of  $60^\circ$  to each side. First an Aluminum rod of 80mm diameter and length of is taken and it is turned and faced in Lathe as a triangular shape of required dimension.

Then groove is taken on the three sides in order to fix the cylinder block to it. Then Central drill of diameter of 12.7mm is done in its length and the 3 drills of 15mm diameter are done from exactly centre of the side to the central drill.

### ***1.7.2 Cast iron cylinder heads***

Used for both racing and passenger vehicles, cast iron cylinder heads are generally considered more durable and believed to make more power due to the fact that the chamber holds in heat. As one would guess from the material used in manufacturing, cast iron cylinder heads are heavier than their aluminum counterparts which usually weigh at least 50% less than the cast iron cylinder heads. Cast iron cylinder heads are often preferred by day-to-day drivers who find them to be cheaper and less expensive to maintain as they tend to have fewer cracks and blown gaskets. On the down side, when cast iron cylinder heads do require attention it can be not only time consuming but expensive to repair. Despite being preferred by day-to-day drivers looking for an inexpensive and durable cylinder head, cast iron cylinder heads are also used in racing vehicles. In fact, certain race tracks are mandated as “iron only”.

### ***1.7.3 Aluminum cylinder heads***

Aluminum cylinder heads are popular among much of the racing set as they are lightweight, and produce more torque than cast iron cylinder heads. Despite the issue of dissipating heat, aluminum cylinder heads are usually easier (less expensive) to repair than cast iron cylinder heads. Close attention must be paid to certain areas such as fastener tightening procedures and issues with valve lash that result from the expansion of aluminum under normal operating temperatures. In general both types of cylinder heads can be beneficial depending on what type of performance you are expecting from your vehicle. Understanding how each work and the benefits and drawbacks will help you better determines which type of cylinder head will best suit your needs.

### ***1.7.4 Cylinder block***

The material for cylinder block is Cast Iron. The Cylinder Block is first cast and then machined and also required surface are finished with suitable methods like boring and honing. The outer diameter was turned. and facing of the top and bottom surfaces are done in a lathe. When boring is done in boring machine, care should be taken to machine it with accurate dimension.

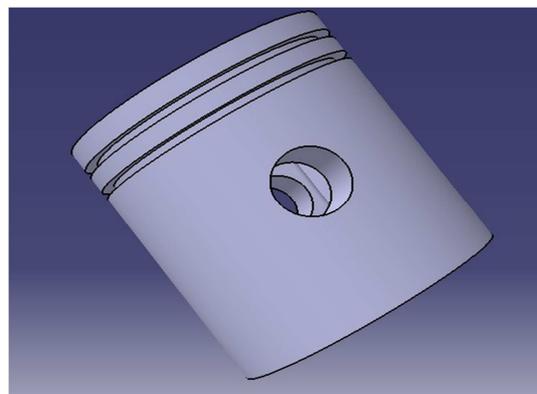


Figure 2 - Piston Diagram

### ***1.7.5 Connecting rod***

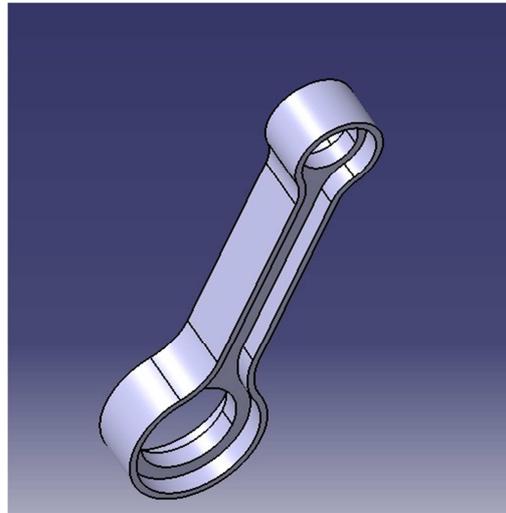


Figure 3 - Connecting rod

The material chosen for connecting rod is mild steel. It is hardened to withstand the pressure of 7 bar. First the template is made with the actual dimension and then gas cutting is done on the mild steel plate for the template dimension and then machined.

### ***1.7.6 Crankshaft assembly***

The Crankshaft is of solid type made of cast iron to withstand the pressure developed by the bearing and the compressor components. The Crank shaft is turned, hardened, ground and the ends are tapered. All the made tapers are checked using ring gauge. Up to 30° taper angle is provided.

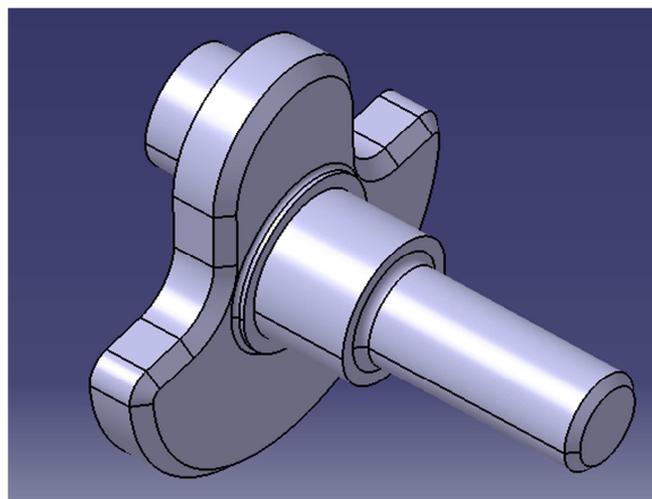


Figure 4 - Crank shaft

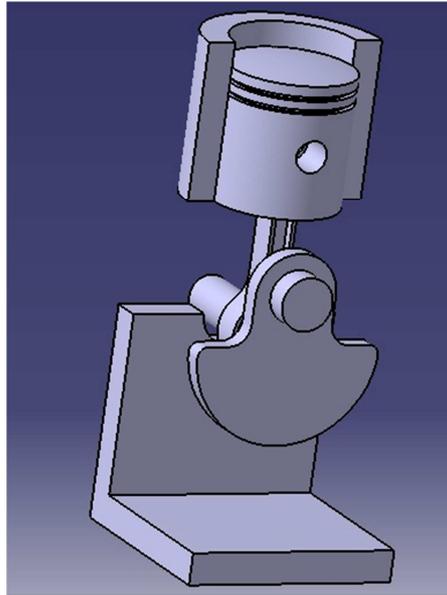


Figure 5 - Piston assembly

The web is separately machine and welded. The end bearings are restricted between the web and end cover. The main connecting rod with its centre bearing is fitted with interference fit to the eccentric crank shaft assembly. The Crankshaft has its centre of gravity off set from the axis of rotation of the Crankshaft. Hence it acts as balancing weight.

### ***1.7.7 End bearings***

The thrust ball bearings are provided on the cover plate to safe guard the Crankshaft. The bearing takes up the variable loads at the reasonable speeds. Care should be taken while placing the bearing in the cover in the centre portion of the body thickness plate.

### ***1.7.8 Stand***

The stand for the Compressor is made in mild steel to withstand all the loads of the Compressor and motor assembly.

### ***1.7.9 Compressor cooling***

When a gas is compressed adiabatically pressure  $P_1$  to  $P_2$  the temperature of gas raised from  $T_1$  to  $T_2$ . The increase in temperature occurs accordingly to the following relation

$$\left(\frac{P_2}{P_1} = \frac{T_2}{T_1}\right)^{\frac{n-1}{n}}$$

Therefore when the stage pressure ratio is high the effect of the raise temp is prominent therefore cooling of the gas is essential. The general types of cooling arrangements available are

- a) Water jacket cooling
- b) Air cooling
- c) Inter Cooling and after cooling

## **2. Plan of experiments**

### ***2.1 Electrical connection***

The electrical power supply must be connected to the motor through starter. Start the unit momentarily and observe the direction of rotating the rotor. The direction should be clockwise. If the direction of rotation is not correct change the direction by interchanging the two places in the starter.

### ***2.2 Adjusting belt tension***

The chain tension between the motor and Crankshaft flywheel must be correctly adjusted with proper tension. Otherwise the Compressor will not run of the required speed.

### ***2.3 Starting procedure***

The following are to be checked before starting the unit.

- Check the oil level in the oil indicator if the level is the oil level indicator if the level is below the minimum mark, add fresh oil to the correct grade.
- Check the chain tension
- Check the suction pipe air filler
- Check that the unit rotates freely by hand and that there is no mechanical obstructions
- Start the unit and allow it to run for a few minutes

### ***2.4 Checks during operation***

- Check whether the running sound is normal
- Check the pressure developed by opening manometer safety device

If all the above preliminary checks are found satisfactory then the unit may be put to regular use.

### 3. Figures and equations

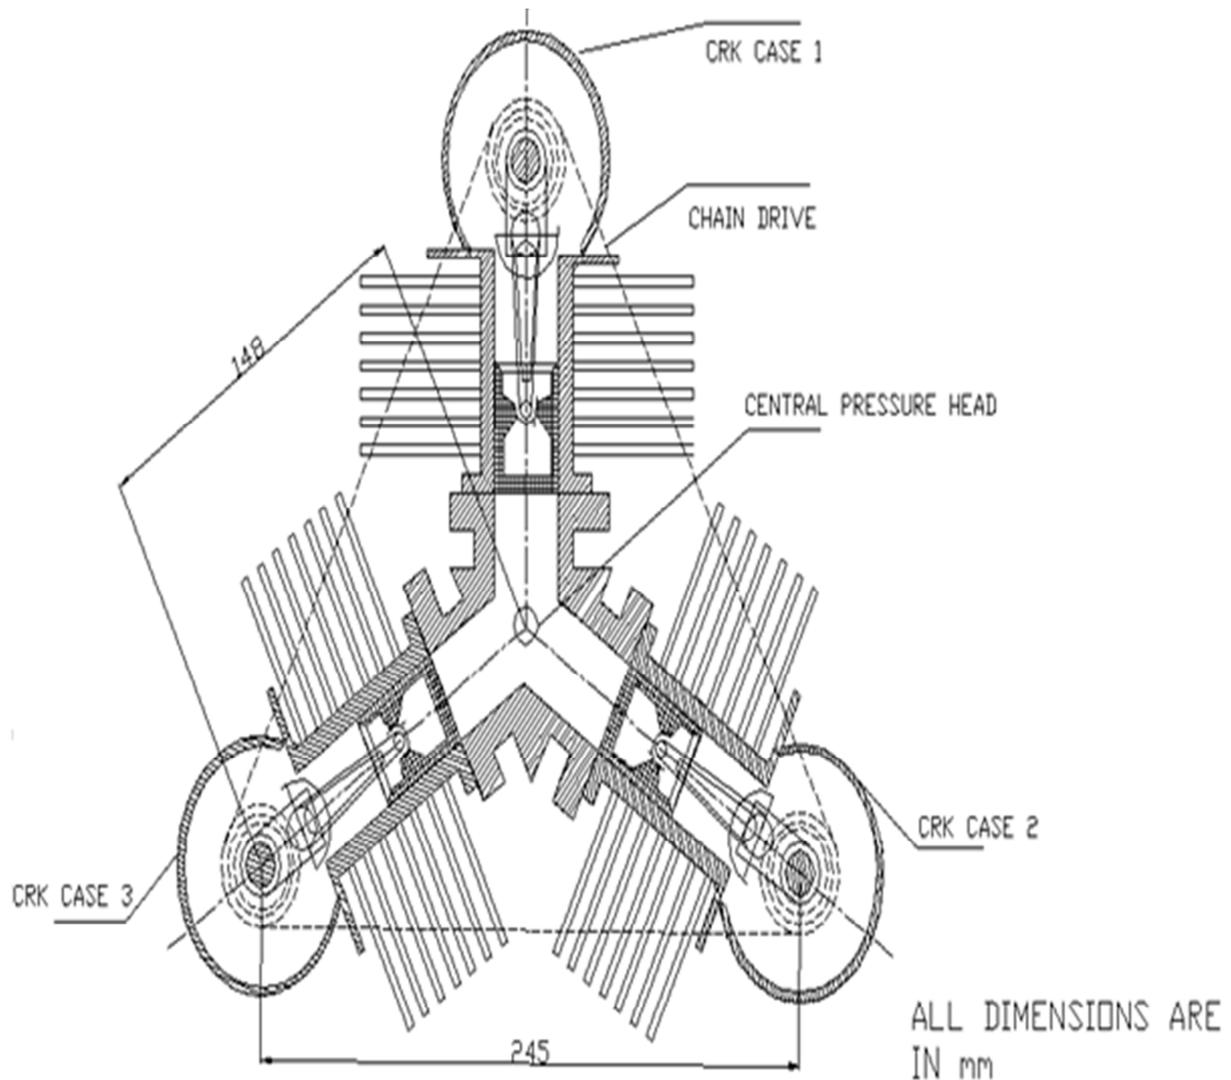


Figure 6 - Design Diagram

#### 3.1 Working principle

This triangular air compressor with common compression chamber consists of three cylinders placed at 120° to each other cylinder. The main aim of this compressor is to generate large amount of air compared with existing compressor with less power input and with low vibration. For this compressor contain three cylinders having their own piston, connecting rod, crank shaft and their drive. Chain drive was preferred to overcome slipping.

When the motor drives the crank shaft all the three piston will move in phase from BDC to TDC, when the piston reaching TDC compression takes place and discharge is done and when reaches the BDC suction condition are obtained and suction takes place.

### 3.2 Comparison of conventional one with ours

We know of several types of compressors made in many renowned factories at Coimbatore for various applications piston type, screwed type valve type etc., but three pistons compressing air into a common compression chamber is not known to be a existing and so we decide to make this novel design to prove its superiority to others in cost and performance.

Any new product must be novel and useful it must be superior is performance, reliable and dependable compared to known models. The cost of making must be comparatively low and in the market it should be capable of competating similar products, is every way, color appearance, value etc. Range must be based on from perspective users and customers. However first working model is only to prove superiority as per maker's claims. When it is compared with the existing ones it has very lesser vibration and lesser oil consumption and it is more reliable than the connectional ones because of having less vibration and also it is a Novel-idea.

### 3.3 Calculation

#### *For 100cc engine*

Bore diameter  $d = 50\text{mm}$

Stroke length  $l = 50\text{mm}$

#### *For replacing engine,*

Bore diameter  $d = 50\text{mm}$

Stroke length  $l = 50\text{mm}$

#### *Whereas three engines are involved*

$$\begin{aligned}
 \text{Area of 100cc engine} &= \pi/4 \times d^2 \\
 A &= 1962.5 \text{ mm}^2 \\
 \text{Area of replacing engine} &= \pi/4 \times d^2 \\
 A &= 1962.5 \text{ mm}^2 \\
 \text{The volume displaced is } V &= \pi /4 \times d^2 \times l \\
 &= \pi \times 5^2 \times 5 \\
 &= 98.125\text{cc} \\
 &\approx 100\text{cc}.
 \end{aligned}$$

***For replacing engine,***

$$\text{The volume displaced is } V = \pi/4 \times 5^2 \times 5 \times 1.5$$

$$\text{Three Cylinders of 50cc each} = 147.18\text{cc}$$

***For three replaced engines,***

$$\begin{aligned} \text{Compressing area } A &= 3 \times 1962.5 \text{ mm}^2 \\ &= 5887.5 \text{ mm}^2. \end{aligned}$$

When comparing the areas of the engines, the replaced engine has high compressing area than 100cc engine

$$\begin{aligned} \text{Difference in area} &= (5887.5 - 1962.5) \\ &= 3925 \text{ mm}^2. \end{aligned}$$

Therefore theoretically 49.06cc of air will be taken in and compressed to the volume of smaller space in the common compression chamber which we have made as to 1.5cm bore×7cm long = 12.37cc or 7times the total 98cc volume = 7 atmospheric pressure.

***3.4 Maintenance procedure******3.4.1 Lubrication***

The Crankshaft and Connecting Rod assembly is lubricated by lubricating oils as mentioned in the recommended lubricants charts. Oil should be filled in the oil tank which sprays oil into cylinder during the suction stroke. Care should be taken to see that the oil level is correctly maintained.

***3.4.2 Daily***

Check the oil level

Check the chain tension

***3.4.3 Every two hours of operation***

Clean the suction filter, to ensure long life for the valves and the piston assembly.

***3.4.4 Every 200 hours of operation***

Check and adjust the chain tension.

Check all the bolts for tightness clean.

Check the developed pressure clean and adjust the safety valve if necessary.

Check the bearing sound.

### ***3.4.5 Every 1000 hours***

The suction and delivery valves should be removed and the valve seats seating should be inspected for any score or damage. The valves may be lapped if necessary in their respective seats using fine lapping compound.

Dismantle the crank shaft bearing and assemble it by new one or by applying grease.

## **4. Result and discussion**

The performance of the compressor was found to be satisfactory and the output of the compressor is continuous it is up to the level expected. Further improvements can be done on the radial compressor.

### ***Advantages***

- 1) Best suitable for low pressure application.
- 2) Less weight compared to other compressor.
- 3) Production cost is low.
- 4) Higher efficiency because of less power required.
- 5) High Durability.
- 6) Compactness of the compressor saves utilization space.
- 7) Easy to use and portable.

### ***Applications***

- 1) Used in laboratories and pharmaceuticals.
- 2) Used for fabrication of plastic structure with hot gas.
- 3) Used for best control fumigation service.
- 4) Used for air agitation of photo film processing tanks, electroplating bath and in chemical plants.

- 5) Used for cooling electronic circuits.
- 6) Used for inflating tyres and air mattresses.
- 7) Used for light duty spray painting.
- 8) Used to operate air driven hand tools such s Die-Polishers, Die-Grinders etc.,
- 9) Used in bore wells to deliver water from the well

#### ***4.1 Conclusion***

The design and fabrication of triangular air compressor in the common compression chamber have been successfully completed and over all assembly of the compressor is drawn in this report.

The performance of the compressor was found to be satisfactory and the output of the compressor is continuous it is up to the level expected. Further improvements can be done on the radial compressor as dealt in the previous chapter.

#### ***4.2 Future scope***

The tri cylinder air compressor with common compression chamber can be improved in following areas,

- 1) Lubrication method to be improved to reduce wear and tear.
- 2) Inter cooling can be used to reduce the work done when multistage compression is used.
- 3) Pressure rise can be increased by reducing the clearance volume.
- 4) The production cost can be reduced by casting the cylinder and the head assembly into a single piece.

#### **References**

- [1] A.MahiNayfeh and H. EyadAbedb of High-gain feedback control of rotating stall in axial flow compressors, Institute for Systems Research, Automatica, 38 (2002) 995 – 1001.
- [2] LIU. Xiaohua, SUN. Dakun, SUN. Xiaofeng and WANG.Xiaoyu, Flow Stability Model for FanCompressors with Annular Duct and Novel Casing Treatment,Chinese Journal of Aeronautics, 25 (2012) 143-154.
- [3]HuibinLianga and Xuehua Lib of Integrated Monitoring System Design of Hybrid Aircompressors,Procedia Engineering, 15 (2011) 938 – 943.
- [4]HuibinLianga and XuehuaLib,Applications of Frequency Conversion Technology in AircompressorUnits Control System,Procedia Engineering, 15 (2011) 944 – 948.
- [5] ShenWeihua and ShenJinfeng of Research and Application on Composite Tooth Institutionsin the Gas Compressor Product,Procedia Engineering, 23 (2011) 551 – 557.

- [6] Jianyi Kong, Guozhang Jiang and LiangxiXie, Research of Intelligent Control of Air Compressor at Constant Pressure, *Journal of Computers*, vol. 7, no.5, May 2012.
- [7] Feng Dongmin, Chen Fu, Song Yanping, Chen Huanlong and Wang Zhongqi, Enhancing Aerodynamic Performances of Highly Loaded Compressor Cascades via Air Injection, *Chinese Journal of Aeronautics*, 22(2009) 121-128.
- [8] Chehhat Abdelmadjida, Si-Ameur Mohamedb and Boumeddane Boussadc, CFD Analysis of the Volute Geometry Effect on the Turbulent Air Flow through the Turbocharger Compressor, *Energy Procedia*, 36 ( 2013 ) 746 – 755.
- [9] Nicola Aldi, Mirko Morini, Michele Pinelli, Pier Ruggero Spina, Alessio Suman and Mauro Venturini, Numerical Analysis of the Effects of Surface Roughness Localization on the Performance of an Axial Compressor Stage, *Energy Procedia*, 45 ( 2014 ) 1057 – 1066.
- [10] N. Levecque, J. Mahfoud, D. Violette, G. Ferraris and R. Dufour, Vibration reduction of a single cylinder reciprocating compressor based on multi-stage balancing, *Mechanism and Machine Theory*, Volume 46, January 2011, Pages 1-9.